



GULLY GRATING AND FRAME

**P400 ENS GRILLE PLATE
DECO
FLAT GRATING**

**Class C250
EN124 : 1994
EN GJS 500-7 Iron
ISO 1083 / EN1563**



DESIGN FEATURES :

- *Material(s) :*
☞ SG Iron to ISO 1083 / EN1563, Grade 500-7.
- *Design load :*
☞ 250 kN to EN124. Group 3 installation area - for gully tops located in kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0,5 m into the carriageway and a maximum of 0,2 m into the footway.
- *Coating :*
Non toxic waterbased black paint.
- *Product Certification :*
NF Mark
This quality mark certifies conformity to the 'NF' regulation 110 and other additional features as highlighted (☞) by the authorising body AFNOR CERTIFICATION, 11, rue Francis de Pressensé F-93571 LA PLAINE SAINT DENIS CEDEX

SPECIAL FEATURES :


- *Surface finish :*
Raised anti-skid pattern improves drainage.
☞ Waterway $\geq 30\%$: 839 cm².
- *Frame type :*
square monoblock frame as cast.
- *Frame bearing pressure :*
☞ $p \leq 7.5$ N/mm².
- *Mass :*
Grating : 11.8 kg.
Product total : 17,1 kg.
- *Securing of cover/grating within frame :*
Depth of insertion : e= 27 mm.

HANDLING :

By means of a hook or pick.

CIVIL ENGINEERING :

The frame is provided with 4 anchoring lugs $\varnothing 10$ mm, allowing a perfect anchoring in rebate concrete.

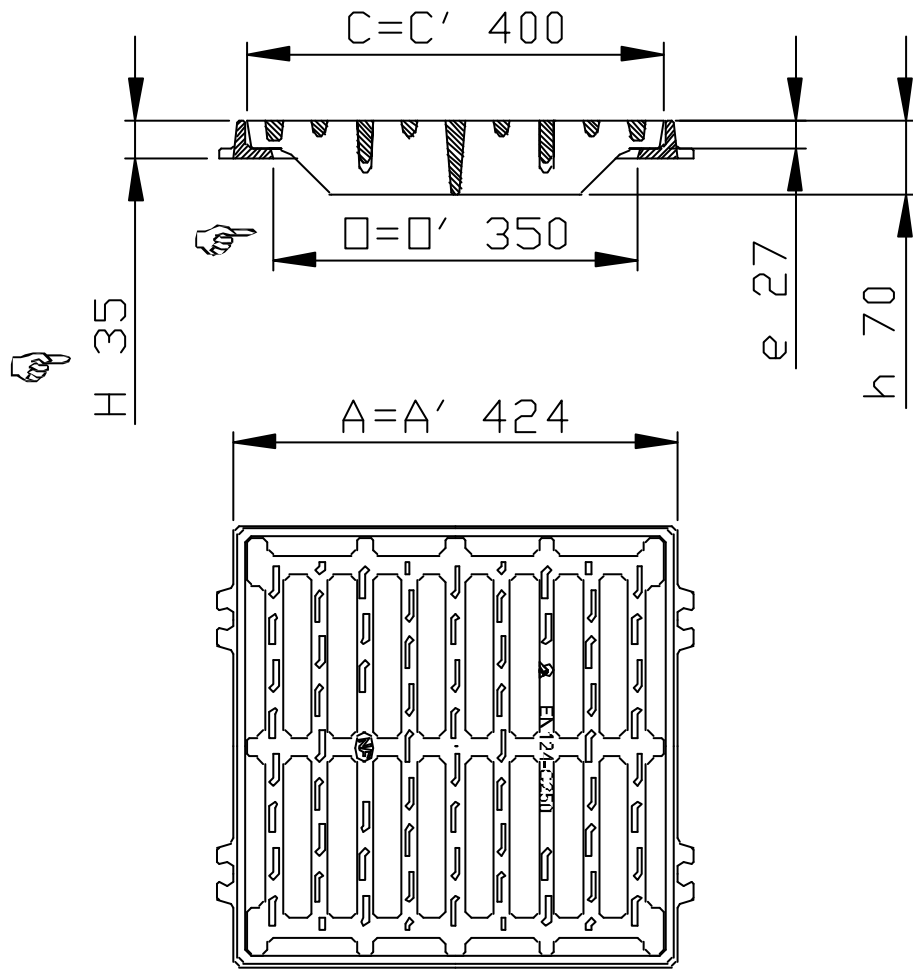

- (☞) Certified characteristics.
- Weights (kg), dimensions (mm) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

CONFIDENTIAL
Property of EJ EMEA
Not to be used without permission.

EJ
ZI De Marivaux | Saint-Crépin Ibouvillers |
BP50409 | 60544 Méru Cedex | France

Quality System ISO 9001 - ISO 14001 - OHSAS 18001

ejco.com

Data sheet :
FT_502584
Date updated :
15.04.2014
Printed : 23.06.2014