



GULLY GRATING AND FRAME

Class C250
EN124 : 1994
EN GJS 500-7 Iron
ISO 1083 / EN1563

P500 ENS GRILLE PLATE
DECO
FLAT GRATING



DESIGN FEATURES :

- *Material(s) :*
 ⚙ SG Iron to ISO 1083 / EN1563, Grade 500-7.
- *Design load :*
 ⚙ 250 kN to EN124. Group 3 installation area - for gully tops located in kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0,5 m into the carriageway and a maximum of 0,2 m into the footway.
- *Coating :*
 Non toxic waterbased black paint.
- *Product Certification :*
 NF Mark
 This quality mark certifies conformity to the 'NF' regulation 110 and other additional features as highlighted (⚙) by the authorising body AFNOR CERTIFICATION, 11, rue Francis de Pressensé F-93571 LA PLAINE SAINT DENIS CEDEX

SPECIAL FEATURES :


- *Surface finish :*
 Raised anti-skid pattern improves drainage.
 ⚙ Waterway ≥30% : 1350 cm².
- *Frame type :*
 square monoblock frame as cast.
- *Frame bearing pressure :*
 ⚙ $p \leq 7.5 \text{ N/mm}^2$.
- *Mass :*
 Grating : 18.7 kg.
 Product total : 26,9 kg.
- *Securing of cover/grating within frame :*
 Depth of insertion : $e= 27 \text{ mm}$.

HANDLING :

By means of a hook or pick.

CIVIL ENGINEERING :

The frame is provided with 4 anchoring lugs $\varnothing 10\text{mm}$, allowing a perfect anchoring in rebate concrete.

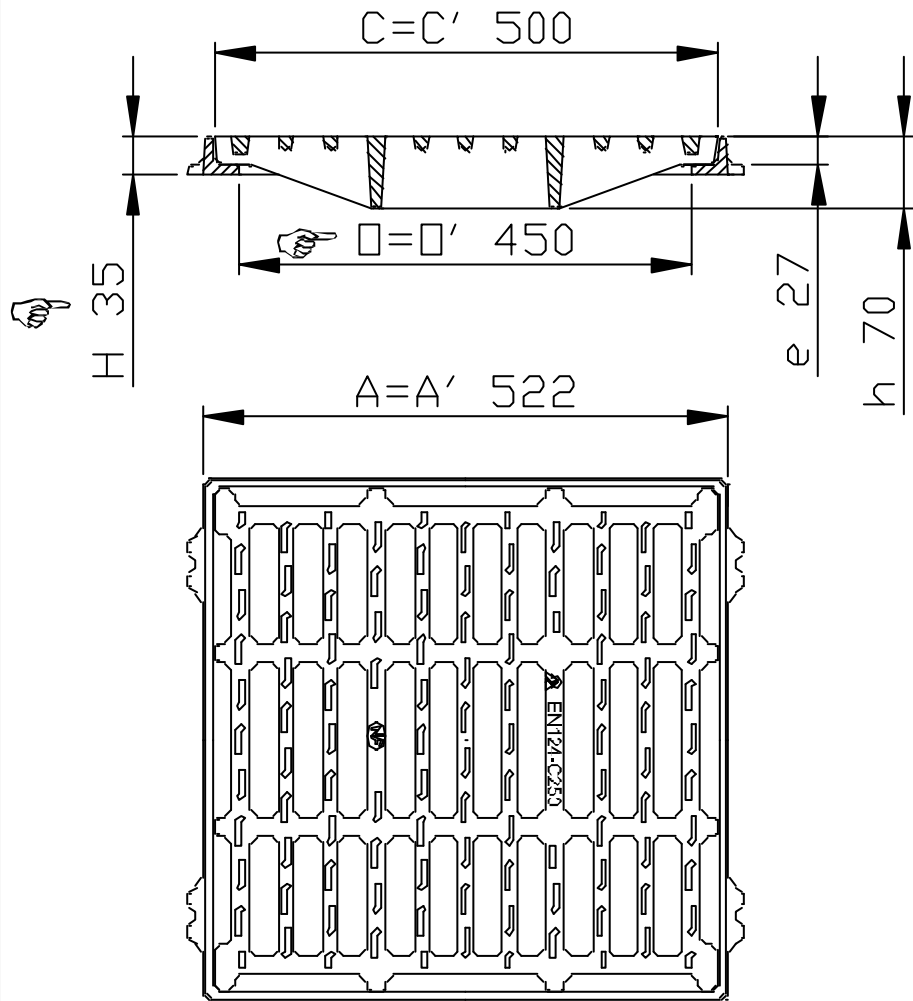

- (⚙) Certified characteristics.
- Weights (kg), dimensions (mm) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

CONFIDENTIAL
Property of EJ EMEA
Not to be used without permission.

EJ
 ZI De Marivaux | Saint-Crépin Ibouvillers |
 BP50409 | 60544 Méru Cedex | France

Quality System ISO 9001 - ISO 14001 - OHSAS 18001

ejco.com

Data sheet :
FT_502589
Date updated :
15.04.2014
Printed : 23.06.2014