



**GULLY GRATING AND FRAME**

**Class C250  
EN124 : 1994**

**P600 ENS GRILLE PLATE  
DECOR  
FLAT GRATING**

**EN GJS 500-7 Iron  
ISO 1083 / EN1563**



**DESIGN FEATURES :**

- *Material(s) :*  
☞ SG Iron to ISO 1083 / EN1563, Grade 500-7.
- *Design load :*  
☞ 250 kN to EN124. Group 3 installation area - for gully tops located in kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0,5 m into the carriageway and a maximum of 0,2 m into the footway.
- *Coating :*  
Non toxic waterbased black paint.
- *Product Certification :*  
NF Mark  
This quality mark certifies conformity to the 'NF' regulation 110 and other additional features as highlighted (☞) by the authorising body AFNOR CERTIFICATION, 11, rue Francis de Pressensé F-93571 LA PLAINE SAINT DENIS CEDEX

**SPECIAL FEATURES :**


- *Surface finish :*  
Grating: Anti-slip surface with 4L patented design.  
☞ Waterway  $\geq 30\%$  : 1830 cm<sup>2</sup>.
- *Frame type :*  
square monoblock frame as cast.
- *Frame bearing pressure :*  
☞  $p \leq 7.5$  N/mm<sup>2</sup>.
- *Mass :*  
Grating : 30.6 kg.  
Product total : 43.7 kg.

**HANDLING :**

By means of a hook or pick.

**CIVIL ENGINEERING :**

The frame is provided with 4 anchoring lugs  $\varnothing 10$ mm, allowing a perfect anchoring in rebate concrete.

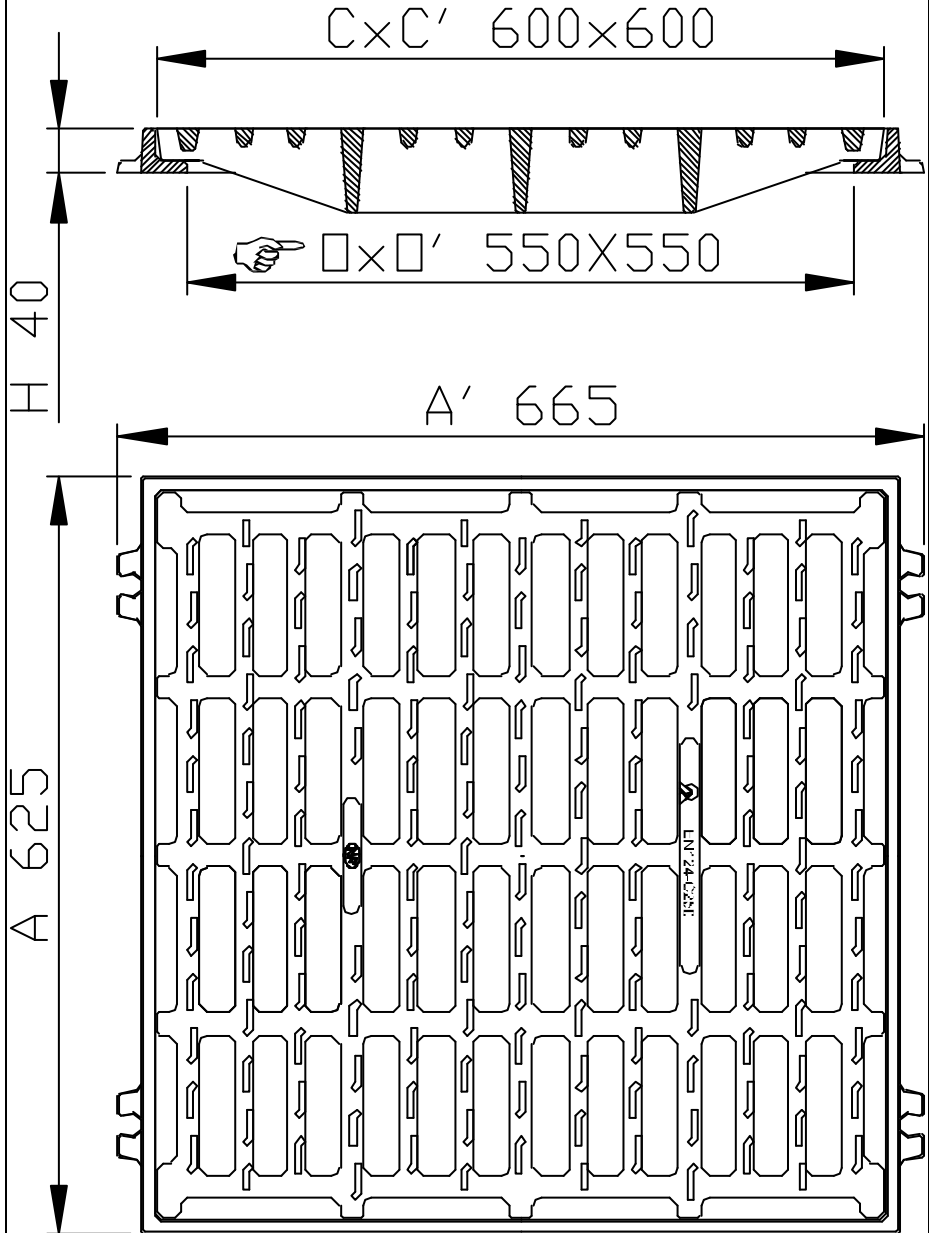

- (☞) Certified characteristics.
- Weights (kg), dimensions (mm) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

**CONFIDENTIAL**  
Property of EJ EMEA  
Not to be used without permission.

**EJ**  
ZI De Marivaux | Saint-Crépin Ibouvillers |  
BP50409 | 60544 Méru Cedex | France  
  
Système Qualité ISO 9001 - ISO 14001 - OHSAS 18001  
  
ejco.com

**Data sheet :**  
FT\_502599  
**Date updated :**  
19.01.2012  
**Printed :** 23.01.2012