



GULLY GRATING AND FRAME

**Class C250
EN124 : 1994**


HISPALIS EN124 C250 NF

**SG Iron 500-7
ISO 1083 / EN1563**

FLAT GRATING


DESIGN FEATURES :

- **Material(s) :**
 ⌀ SG Iron to ISO 1083 / EN1563, Grade 500-7.
- **Design load :**
 ⌀ 250 kN to EN124. Group 3 installation area - for gully tops located in kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0,5 m into the carriageway and a maximum of 0,2 m into the footway.
- **Coating :**
 Non toxic waterbased black paint.
- **Product Certification :**
 NF Mark
 This quality mark certifies conformity to the 'NF' regulation 110 and other additional features as highlighted (⌀) by the authorising body AFNOR CERTIFICATION, 11, rue Francis de Pressensé F-93571 LA PLAINE SAINT DENIS CEDEX

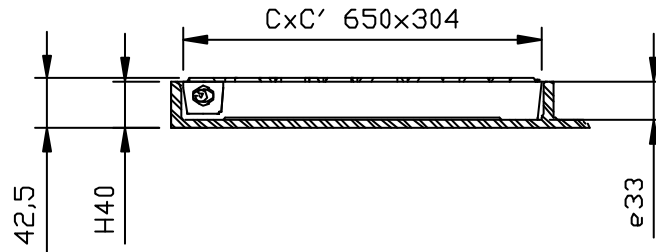

SPECIAL FEATURES :

- **Mass :**
 Grating : 14 kg.
 Product total : 22 kg.
- **Frame type :**
 Rectangular monoblock as cast.
- **Grating type :**
 Flat grating for duct
- **Hinge :**
 Captive hinge grating
 Secured (Cover block at 90° preventing accidental closure).
 ⌀ Opening angle ≈ 120°.
- **Waterway :**
 ⌀ Waterway ≥30% : 911 cm².
- **Frame bearing pressure :**
 ⌀ p ≤ 7.5 N/mm².
- **Securing of cover/grating within frame :**
 Depth of insertion : e= 33 mm.

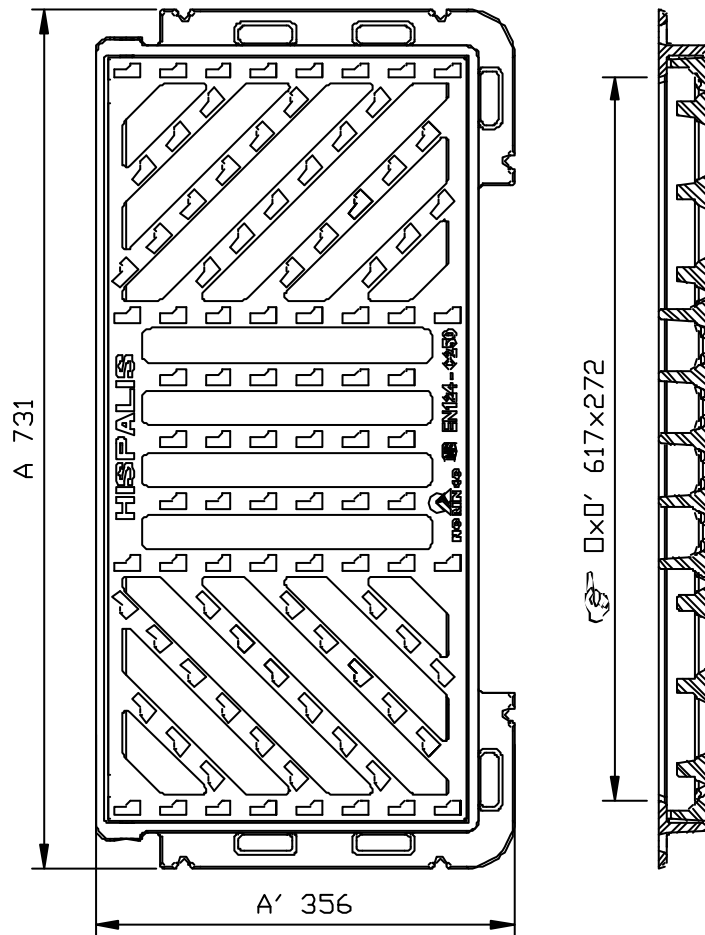

HANDLING :

By means of a hook or pick.

- (⌀) Certified characteristics.
- Weights (kg), dimensions (mm) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

CONFIDENTIAL
 Property of EJ EMEA
 Not to be used without permission.

EJ
 ZI De Marivaux | Saint-Crépin Ibouvillers |
 BP50409 | 60544 Méru Cedex | France

 Système Qualité ISO 9001 - ISO 14001 - OHSAS 18001

 ejco.com

Data sheet :
FT_534088
Date updated :
19.03.2012
Printed : 20.04.2012