

**DESING FEATURES:**

**Material:**

Spheroidal graphite cast iron  
(Ductile Iron)

**Design Load:**

250kN, suitable for Group 3 areas; for gully tops install in the area of curbside channels of road which when measured from the curb edge, extend a maximum of 0.5m into the carriage way and a maximum of 0.20 into the footway.

**Coating:**

Bituminous black paint.

**Markings:**

EN124 C250  
DIMENSIONS  
COVER CY

**Special features:**

**Cover:**

Provided with two key ways (keyholes) to allow removal by means of a special key or a hook.




Positioning the cover on to the frame forms a continuous peripheral u-bend to prevent odours from escaping. (see detail & drawing No.1)

**Sealing:**

Frame design allows to retain sealing material

**Option:**

Badging: Please enquire  
Other sizes: Please enquire

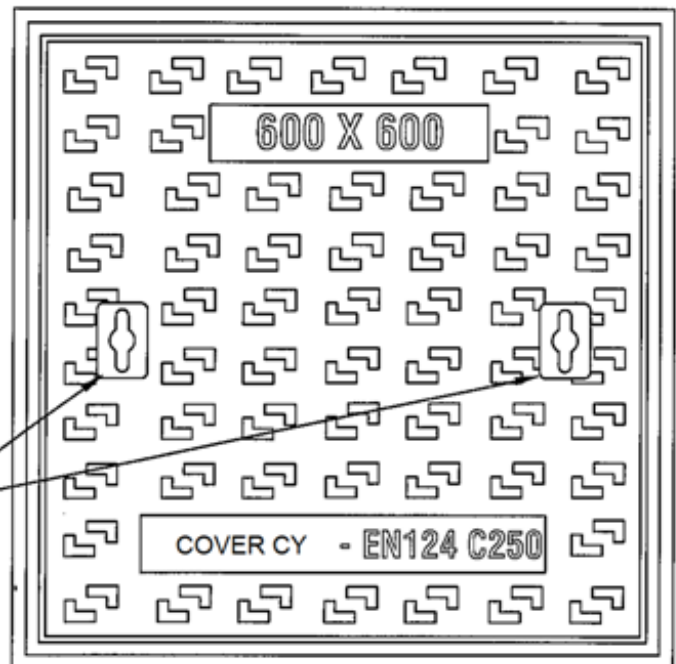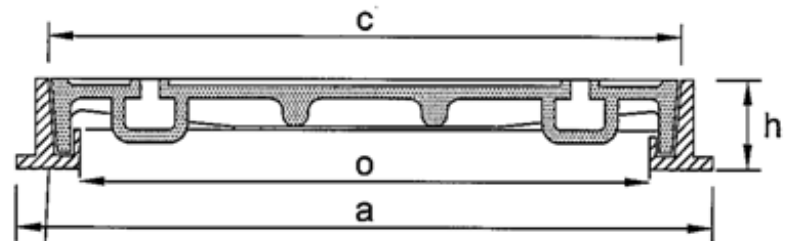

Keyholes

Ref.	oxo	cxc	axa	h
CSC 5050	400X400	480X480	500X500	45
CSC 5555	450X450	490X490	550X550	65
CSC 5570	600X450	640X490	550X700	65
CSC 7070	600X600	640X540	700X700	60
CSC 8080	700X700	740X740	800X800	60

All dimensions are in mm

Drawing Serial No.10

**CONFIDENTIAL**  
Property of  
**ChtiSMa trading Ltd**  
Not to be used without  
its permission

**ChtiSMa trading Ltd**  
IMPORTERS-EXPORTERS-AGENTS  
Tel. 00357 - 25 - 395280  
Fax : 00357 - 25 - 394671  
E-mail: chtisma@cytanet.com.cy

Date: / /  
Authorized signature