



GULLY GRATING AND FRAME

**Class C250
EN124 : 1994**

**P600V ENS GRIL. PLATE
VERR
FLAT GRATING**

**EN GJS 500-7 Iron
ISO 1083 / EN1563**



DESIGN FEATURES :


- **Material(s) :**
 ⌀ SG Iron to ISO 1083 / EN1563, Grade 500-7.
- **Design load :**
 ⌀ 250 kN to EN124. Group 3 installation area - for gully tops located in kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0,5 m into the carriageway and a maximum of 0,2 m into the footway.
- **Coating :**
 Non toxic waterbased black paint.
- **Product Certification :**
 NF Mark
 This quality mark certifies conformity to the 'NF' regulation 110 and other additional features as highlighted (⌀) by the authorising body AFNOR CERTIFICATION, 11, rue Francis de Pressensé F-93571 LA PLAINE SAINT DENIS CEDEX

SPECIAL FEATURES :

- **Surface finish :**
 Raised anti-skid pattern improves drainage.
- **Mass :**
 Grating : 37 kg.
 Product total : 51,867 kg.
- **Grating type :**
 Flat grating for duct
 ⌀ Waterway $\geq 30\%$: 2050 cm².
 Bars special design provides maximum water drainage
- **Frame type :**
 square monoblock frame as cast.
- **Frame bearing pressure :**
 ⌀ $p \leq 7.5$ N/mm².
- **Securing of cover/grating within frame :**
 ⌀ Locking by flexible front/ rear bars.

HANDLING :

- By means of a hook or pick.
- OPENING :**
 Prise against spring latch to unlock grating.
- RESETTING :**
 Put back grating.
 Kick down to lock grating.

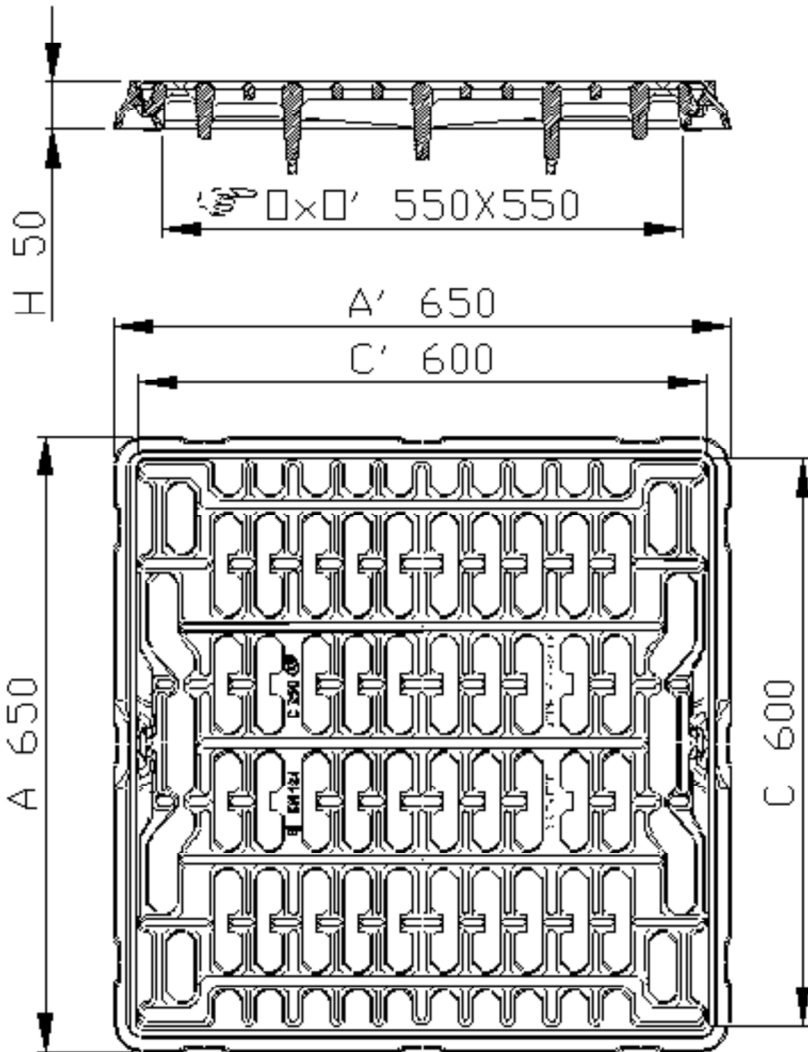

- (⌀) Certified characteristics.
- Weights (kg), dimensions (mm) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

CONFIDENTIAL
Property of EJ EMEA
Not to be used without permission.

EJ
 ZI De Marivaux | Saint-Crépin Ibouvillers |
 BP50409 | 60544 Méru Cedex | France

Quality System ISO 9001 - ISO 14001 - OHSAS 18001

ejco.com

Data sheet :
FT_510620
Date updated :
15.04.2014
Printed : 16.04.2014