


PLAN OF COVER & FRAME



SECTIONAL VIEW

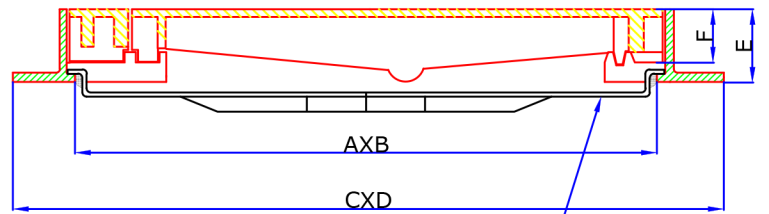

Badging Details

Covers are paint with epoxy paint 200 microns

Access covers manufactured from ductile cast iron in accordance to standards ISO 1083 (grate 500-7) and EN1563. Load classification D400 to EN124. It is provided with 2 closed keyways to allow removal by means of a hook. Frame incorporating a rubber seal to prevent noise and vibration (non-rocking). 4 anchoring holes can be fixed to the frame to brickwork as necessary.

Paint		Weight	
Paint	Expyo	Single Cover	43.0 kg
		Frame	40.0 kg

Note : -There is no provision Rubber seal of in this design.

CODE	CLEAR OPENING AXB (MM)	OVER BASE CXD (MM)	FRAME HEIGHT E (MM)	DEPTH OF INSERTION F (MM)	LOADING KN	STANDARD
DI-35	900X600	1060X760	100	75	400	EN 124-2015

DATE : 10-02-2023

DRAWN BY : MC

CHECKED BY: PC

APP.BY: PC

DESCRIPTION :

900x600MM CLEAR OPENING DOUBLE TRIANGULAR
 DUCTILE IRON LOADING CLASS D-400
 COVER & FRAME
 WITH GRP PROVISION .

REV : 0

SCALE : NTS

ALL DIMENSIONS ARE
 IN MM