

# Technodrain

## ASOPLAST TECHNODRAIN

Code: TCEL200HD18GS - Channel EXEL 200H D400

HD-PE linear drainage channel, complete with galvanized frame and ductile iron grating D400 (18 mm slot)

### TECHNICAL DATA CHANNEL EXEL 200H ( EN 1433, TYPE M)





Lenght (mm):	1.000
External width (mm):	258
Internal width (mm):	200
External high (mm):	210
Internal high (mm):	150
Frame thickness (mm):	4
Drainage section (cm <sup>2</sup> ):	290,60
Volume (dm <sup>3</sup> ):	29,06
Side outlets	2 x DN 110
Vertical outlets	1 x DN 110, 1 x DN 160
Groove and tongue joint with security clip	

### TECHNICAL DATA DUCTILE IRON GRATIN SLOT 18 mm, EP 200 D400

Lenght (mm):	500
External width (mm):	245
High (mm):	25
Total height (mm):	37
Slot opening size (mm)	190x18
Drainage open area (cm <sup>2</sup> ):	402
Lock system to the channels with no. 8 bolts M8	
Loading class D400 (EN 1433)	

Total weight (channel + frame + gratings)                      Kg 22,90/ml

Ø160  
Ø110

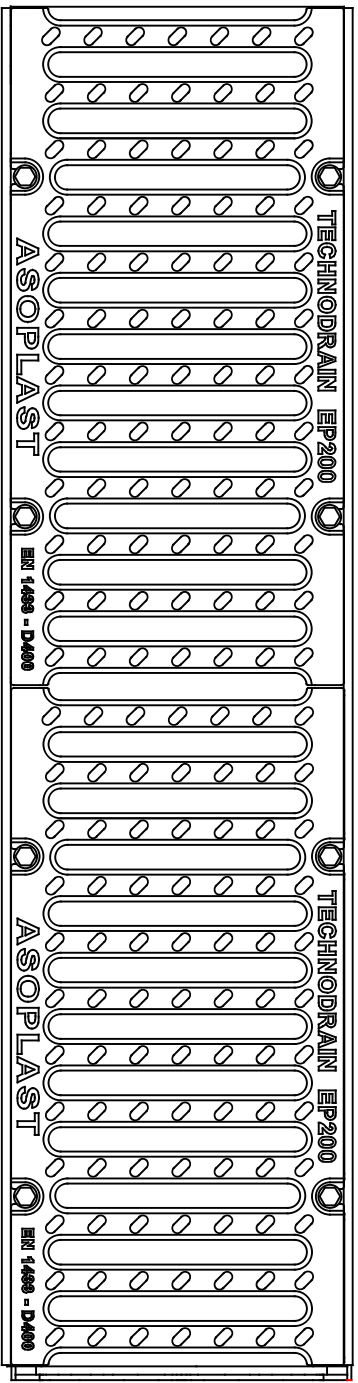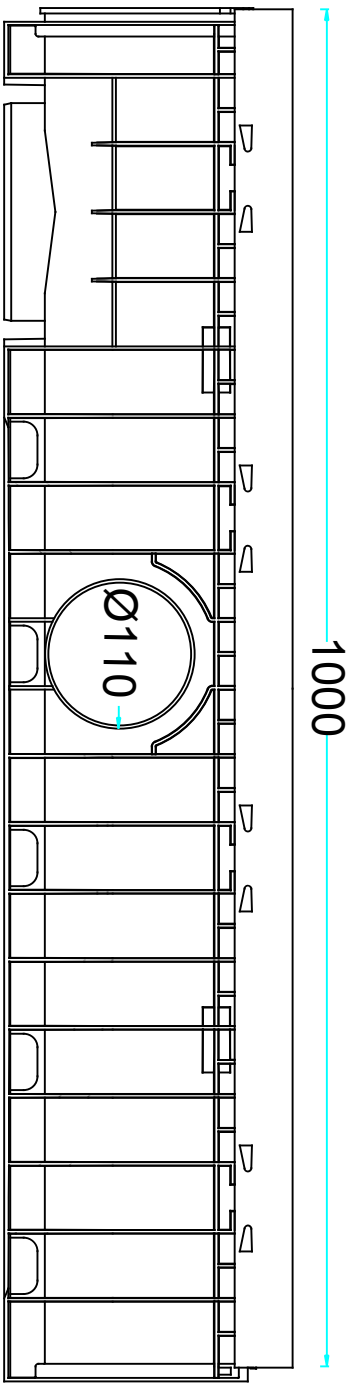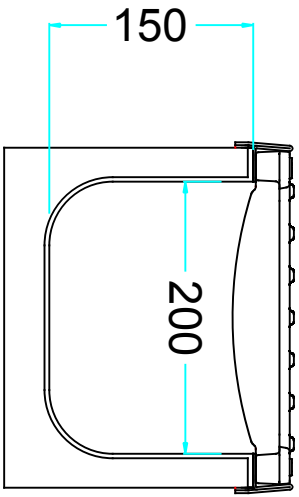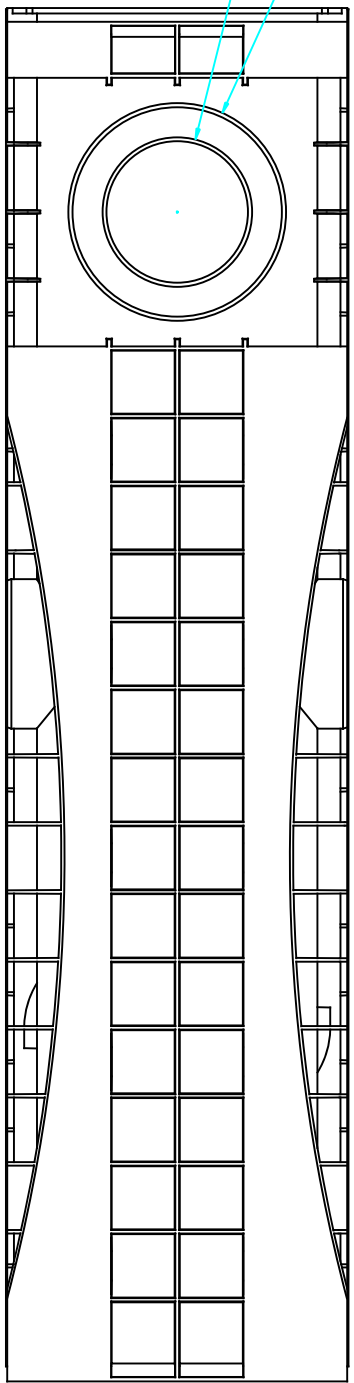

258

212

TCCEL200HD18GS - EXEL 200H + DUCTILE IRON GRATINGS D400 18 mm slot



