



**ACCESS COVERS & FRAMES**

**REVO 800 B125 NF**

**SQUARE SINGLE SEAL / HC RANGE**

**Class B125**  
**EN124-2 : 2015**  
**EN GJS 500-7 Iron**  
**ISO 1083 / EN1563**

**DESIGN FEATURES :**

- **Material(s) :**  
 ☞ SG Iron to ISO 1083 / EN1563, Grade 500-7.
- **Design load :**  
 ☞ 125 kN to EN 124.  
 Installation area :  
 Group 2 - Footways, pedestrians areas and comparable areas, car parks or car parking decks, and lower groups.
- **Coating :**  
 Non toxic waterbased black paint.
- **Product Certification :**  
 TO BE CERTIFIED NF.

**SPECIAL FEATURES :**



- **Mass :**  
 Cover : 42.6 Kg  
 Product total : 49.70 kg.
- **Surface finish :**  
 Cover: Anti-slip surface with 4L patented design.
- **Frame type :**  
 ☞ single seal ≥ 6mm. Odour resistant.  
 square monoblock frame as cast.
- **Frame bearing pressure :**  
 ☞  $p \leq 7.5 \text{ N/mm}^2$ .

**HANDLING :**

The cover is provided with one keyway to allow removal by means of a hook or pick.

**OPTION(S) :**

Badging : others badgings please enquire

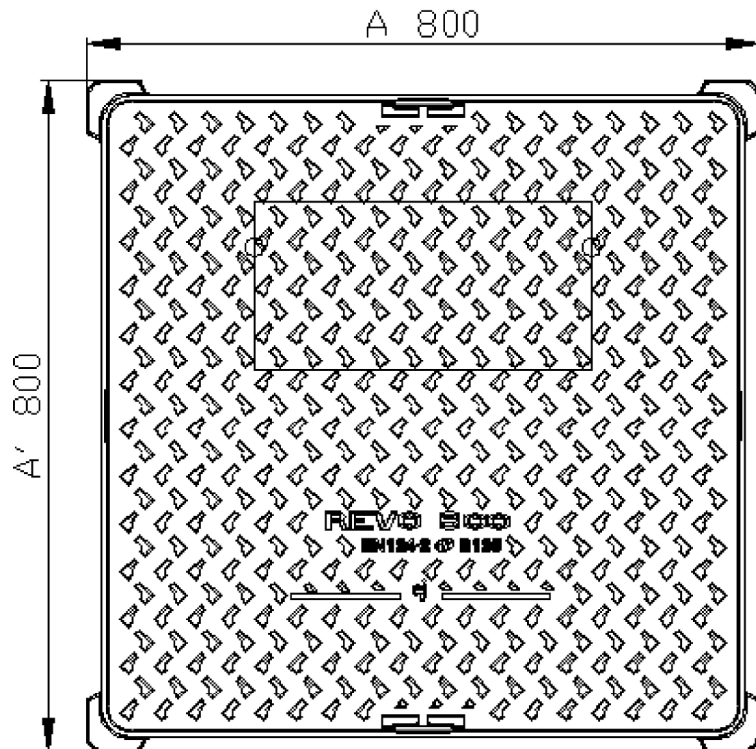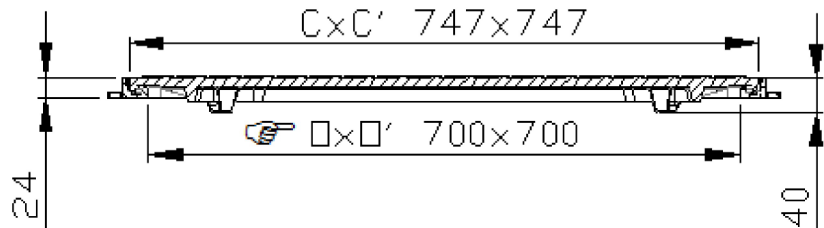

- (☞) Certified characteristics.
- Weights (kg) provided are the medium values detected during production of separate product parts with application of 10% of tolerance.
- Dimensions (mm) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice / Uncontrolled distribution

**CONFIDENTIAL**  
 Property of EJ EMEA  
 Not to be used without permission.

**EJ**  
 ZI De Marivaux | Saint-Crépin Ibouvillers |  
 BP50409 | 60544 Méru Cedex | France  
 Quality System ISO 9001 - ISO 14001 - OHSAS 18001  
 ejco.com

**Data sheet :**  
**AP\_548908**  
**Date updated :**  
**22.02.2017**  
**Printed : 09.03.2017**